


Vega K105 MT



	31x15.50-15 XTC	31x15.50-15 STG	440/50R17 ALL GROUND	425/55R17 AC70G	340/65R20
	with fixed rim	with fixed rim	with fixed rim	with fixed rim	with adjustable rim
A Tyre width (mm)	368	394	431	430	343
B Tyre diameter (mm)	800	800	873	884	958
C Wheel track min/max (mm)	1510	1510	1476	1476	1354/1618
D Width min/max (mm)	1878	1904	1907	1906	1697/1961

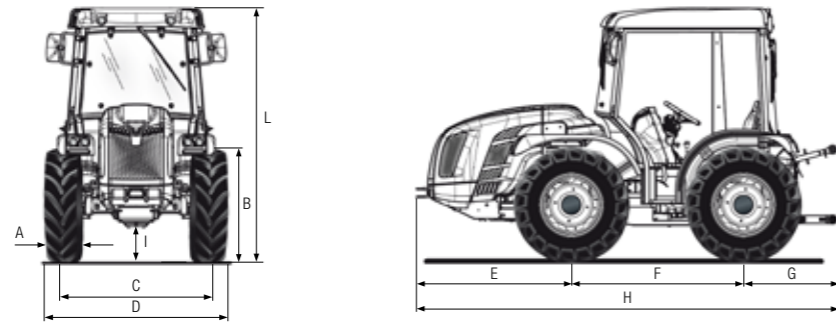

Dimensions Vega K105 MT (mm):					
E	F	G	H	I min/max	L min/max
1348	1495	882	3725	184/294	2070/2180

TECHNICAL FEATURES	Vega K105 MT
ENGINE	KUBOTA V3800 CR-TE4
Number of cylinders	4 in-line
Displacement (cm ³)	3,769
Intake	Turbo
Fuel system	Direct injection "Common rail"
Emission level	Stage 3B
Balancing	Counter-balance shafts
Power (kW/HP)	72.1 / 98
Rated speed (rpm)	2,400
Maximum torque (Nm/rpm)	330 / 1,500
Speed management	Electronically regulated with a console with functions: increase and decrease of engine speed, memorize and recall a particular speed or switch off the electronic throttle and go to the minimum idle speed
Cooling	Liquid
Tank capacity (lt)	54
Air filter	Integrated cyclone prefilter with high-performance air filter and front air intake
CHASSIS	Swinging integral chassis OS-FRAME with steering wheels
DRIVE	Four-wheel drive. Front-wheel drive disengagement with electro-hydraulic control
TRANSMISSION	32 speeds synchronized gearbox: 16 FWD and 16 REV with synchronized reverser
POWER SHUTTLE EASYDRIVE® (optional)	Electro-hydraulic power shuttle electronically actuated with the lever (with 3 position FWD-N-REV) installed on the left of steering wheel. Possibility to choose from 5 levels of reactivity
Transmission clutch	Multidisc in oil bath electronically-managed and proportional hydraulic control with PRO-ACT System
DIFFERENTIAL	Front and rear. Differential lock: front and rear simultaneously or only rear with electro-hydraulic control
AXLES	Front and rear with epicyclic reduction units. Front axle, oscillating in the middle (approx. ±15°)
REAR PTO	Independent from the gearbox and synchronized with forwarding speed. Engageable under load with brake in disengaged position
PTO clutch	Multidisc in oil bath with electro-hydraulic control
PTO rotation speed (rpm)	Standard: 540/1,000 - Optional: 540/540E
HYDRAULIC SYSTEM	Double circuit with independent pumps and heat exchanger
Flow rate to the hydroguide and the electro-hydraulic controls (lt/min)	33
Flow rate to the lift and the control valves (lt/min)	30
Maximum hydraulic pressure (bar)	180
REAR CONTROL VALVES	Mechanical control
Standard	1 single acting and 2 double acting
Optional and in addition to the standard ones	1 single acting or 1 double acting or 1 double acting with float
Joystick (optional)	With proportional electronic control of lifts and control valves consisting of: 1 single acting without free return and 3 double acting (replacing the standard ones). Potentiometer to change the sensibility of the joystick
ELECTRIC SYSTEM	Battery 100 Ah / 12 V - Alternator 95 A
Rear power outlets	7 pin and 3 pin
REAR LIFT	By four external rams with hydraulic suspension and Dual Floating System®
Three-point hitches	Quick couplings, L-shaped, cat. 1 and 2, arms with adjustable length and hooks with adjustable width
Three-point tie bar	Standard: with manual adjustment Optional: hydraulically controlled upper link and tie rod link arm
Ball joint lifting capacity (kg)	2,300
FRONT LIFT (optional)	By two external rams with front protection and 2 double acting control valves with free return
Three-point hitches	Rigid with quick couplings cat. 1
Lifting capacity (kg)	800
DRIVING PLATFORM	Wider version, reversible with platform suspended on silent block. Suspended pedals mounted on rotating control column
Steering wheel	With adjustable inclination
Seat with gas spring for easy tipping and safety belt	Standard: comfortable sprung seat, adjustable according to the driver's weight - Optional: pneumatic seat
SERVICE BRAKES	Oil bath discs with hydrostatic control, acting on the four wheels
Parking brake	Automatic and independent Brake-Off
STEERING	Hydrostatic steering acting on front wheels. Flow deviator for steering unit
SAFETY	Standard: semi-cabin and beacon lamp
CABIN (optional)	Homologated and sound-proof with monocoque body fitted on silent-block, beacon lamp and fabric covered seat. With ventilation, heating system and air conditioning
INSTRUMENT PANEL	With multi-function colour and digital display complete with: hour counter, battery voltage, fuel consumption, DPF level, simultaneous reading of engine speed, forwarding speed and PTO speed. Warning lights and acoustic alarm
TYRES (standard)	31x15.50-15 XTC
Optional	340/65R20 * 31x15.50-15 STG * 440/50-17 All-Ground * 425/55-17 AC70G
TOW HOOKS (standard)	Rear CUNA and front
Optional	Rear tow hook: EC approved or EC approved (Slider type) or CUNA (Slider type)
WEIGHT in order of speed	
With semi-cabin (kg)	2,480
With cabin (kg)	2,560
OPTIONAL	Front bumper, Front weight, Weights for wheels, Air prefilter with impeller, Active carbon filter for cabin