

# FORESTRY TILLERS

## SSL



from 100 to 220 HP



Ø30 cm max



D30 cm

### FORESTRY TILLER WITH FIXED TOOTH ROTOR.

This is the smallest model in FAE's line of Forestry Tillers. Thanks to its low weight and multiple working width options, the SSL fits a wide range of tractors.

The transmission with side gearbox allows the rotor to spin at a lower RPM than a traditional belt driven mulcher. This makes the transmission much more reliable, and ensures a deep, consistent grinding while also lowering tool wear.





#### STANDARD EQUIPMENT

- Friction clutch on side PTO
- PTO shaft with cam clutch
- Gearbox with freewheel
- Transmission with side gearbox
- Hydraulic hood
- Flat pressed welded steel counter-blades
- Enclosed machine body
- Inside lateral protections
- Protection chains

#### OPTIONS

- Hydraulic top link
- Hydraulic controlled roller
- Different teeth

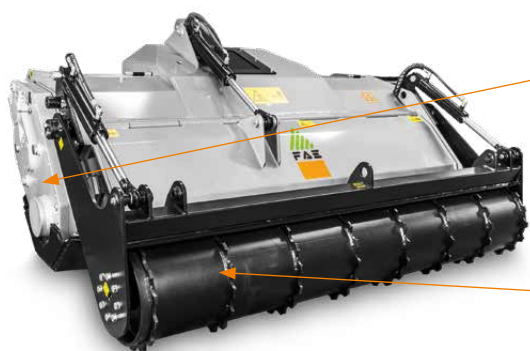

**Dual transmission with side gearbox**  
reduces rotor speed while maintaining power



**Hydraulic controlled roller**  
helps with minor compaction and working uneven terrain

MODEL	Tractor (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type B/3 + C/3/SS
	min	max							
SSL 150	100	160	1000	1580	1880	2080	300	300	54+4
SSL 175	110	160	1000	1820	2120	2260	300	300	66+4
SSL 200	120	220	1000	2060	2360	2620	300	300	74+4
SSL 225	130	220	1000	2300	2600	2810	300	300	82+4
SSL 250	140	220	1000	2540	2840	2990	300	300	96+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.